




Bedspread, Coverlet & Dust Ruffle Guide




Thomas W. Raftery, Inc.
Covering the World with Quality
1-800-243-2887

Bedspread Styles


Throw Style with Bell Corners

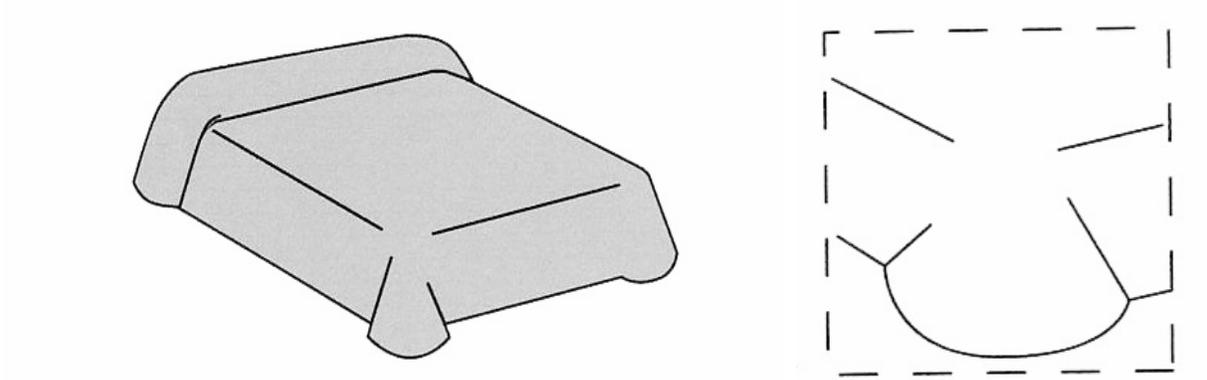

Fitted with Gussets


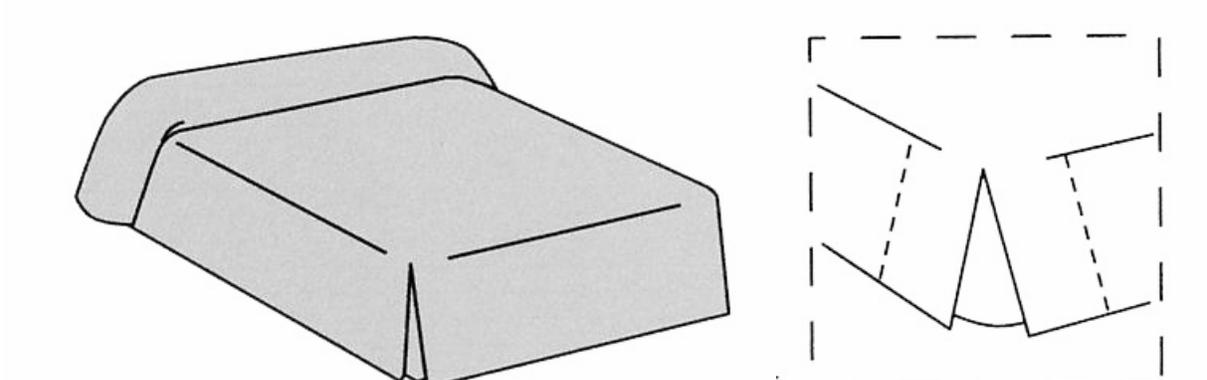


Fitted Waterfall


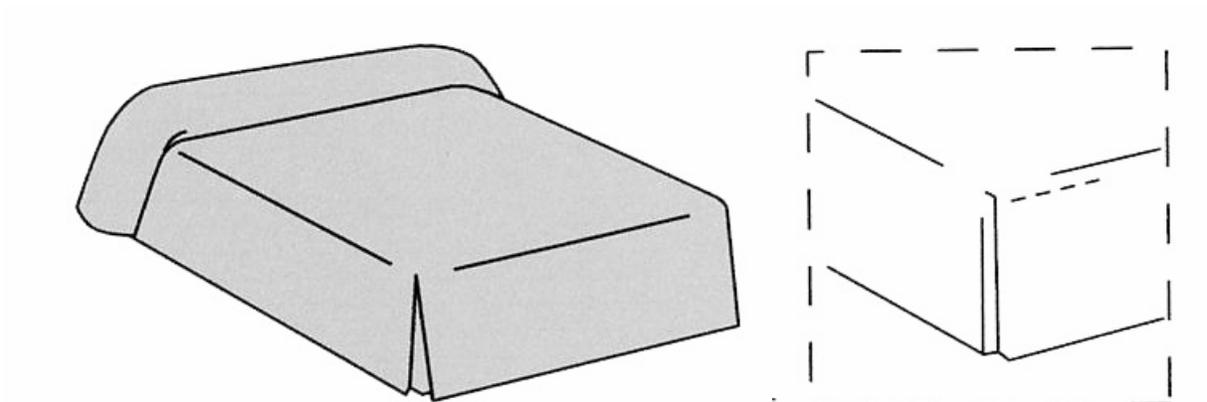


Coverlet Styles



Throw Style with Bell Corners

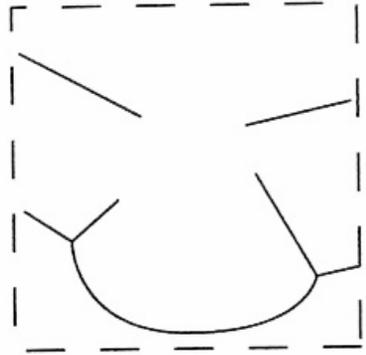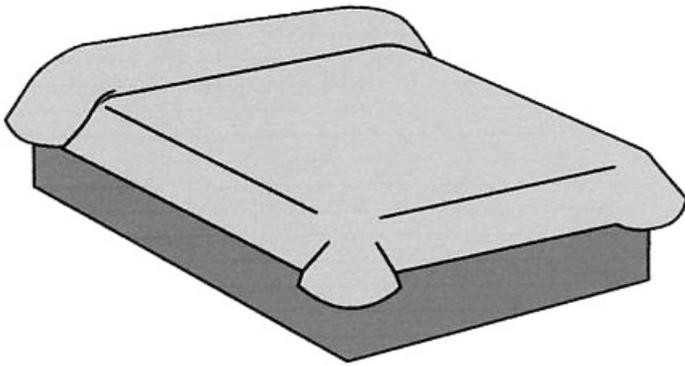

Fitted with Gussets

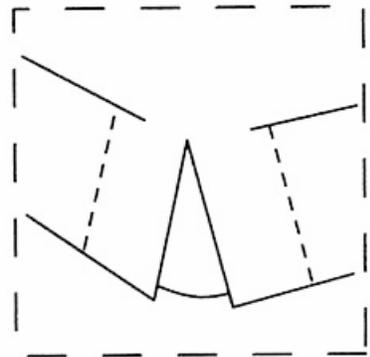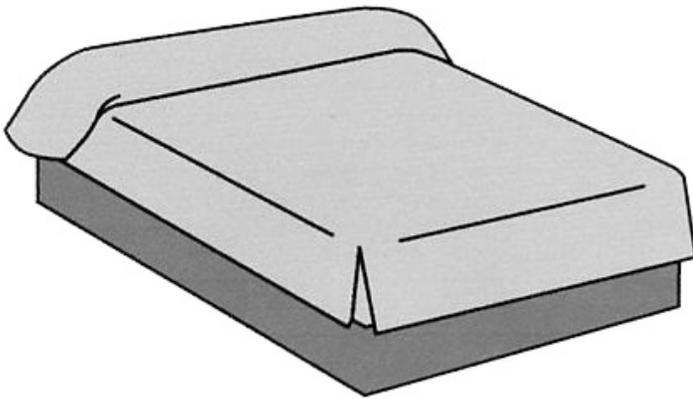


Fitted Waterfall

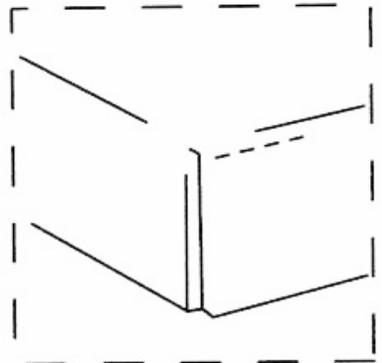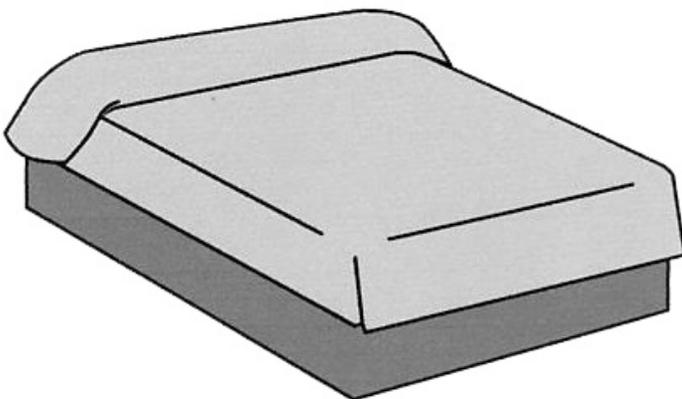


Dust Ruffles


Shirred

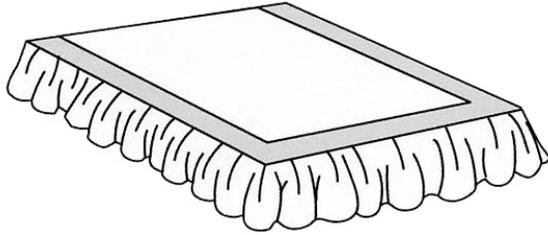

Tailored

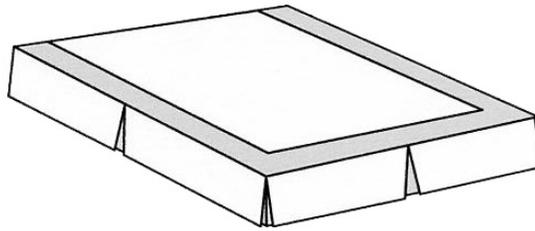

Box Pleated

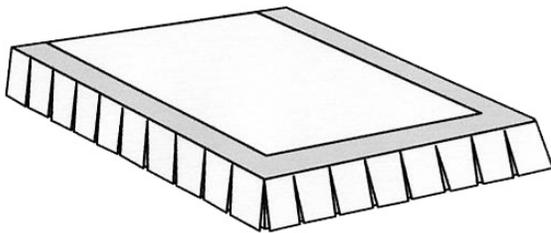

Dust Ruffle Specifications

Dust ruffles shall either be shirred (gathered), box pleated or tailored on three sides (foot and two side edges) using a minimum of 100% fullness. Drops go from edge of box spring to approximately 1/2 inch above the floor. Top decking shall be 56% cotton, 44% polyester sewn to drops using a double lock stitch. Bottom hems of drops shall be double folded one inch single straight stitched. Coverlets to overlap each dust ruffle by approximately two inches.


Sizes

Standard Measurements **

	Mattress	Drop	Bedspread Finished Size	Coverlet Drop	Coverlet Finished Size
Captain	38 x 80	13"	64 x 113	N/A	N/A
Twin	39 x 75	21"	81 x 116	13"	65 x 108
Twin XL	39 x 80	21"	81 x 121	13"	65 x 113
Full	54 x 75	21"	96 x 116	13"	80 x 108
Full XL	54 x 80	21"	96 x 121	13"	80 x 113
Queen	60 x 80	21"	102 x 121	13"	86 x 113
King	78 x 80	21"	120 x 121	13"	104 x 113

** Actual measurements are necessary due to variations in bedding standards. The drop is especially important, as it has been changing in recent years due to increases in mattress thickness. Measurements are done at the property for correct mattress and drop sizes before production begins. Pre-production mock-ups provided upon request.

How to Measure

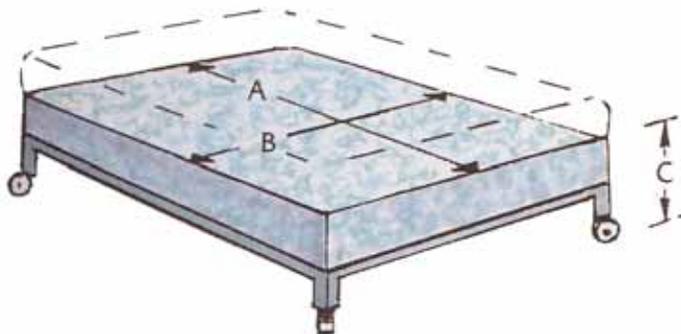

A = Width of the mattress

B = Length of the mattress

C = Drop from top of mattress to the floor

D = Drop from top of box spring to the floor for dust ruffles

Specifications

Types

Bedsread: Quilted cover to the floor.

Coverlet: Quilted cover extends a few inches below the box spring. Normally used with a dust ruffle.

Duvet Cover: Drops may be any length and a duvet insert is required.

Styles

Throw Style: Fabricated with rounded “bell” bottom corners.

Fitted Style with Gusset: Fabricated with a split bottom corners with a quilted, matching gusset sewn into the corner.

Coverlet: Fabricated the same as Throw or Fitted, except the drops will be shortened to accommodate the use of a dust ruffle.

Seams

Bedsreads shall be constructed with seams located at the edge of the mattress (twin or full) or 54 inch center panel (Queen or King) with two equal drops from edge of center panel to one half inch above the floor. Printed fabrics shall be matched in the seams.

Quilting

All bedsreads will be quilted using the Gribetz DG-1200 lockstitch quilting machine. Bedsreads will be quilted continuously on wide width (136”) computerized quilting machine. Quilting stitches must be 8 to 10 stitches per inch, lock stitched not chain stitched. Quilting pattern to be selected.

Thread

Thread shall equal to Danfield Precision D-33 lubricated nylon, matching the bedsread fabric in color. Use of monofilament is prohibited.

Backing

Backing will be 56% cotton, 44% polyester, pattern Berry, color white. Upgraded colored lining available upon request.

Fiberfill

100% resin finished virgin polyester. Bonded fiberfill shall weight a minimum of 4.7 ounces per square yard. Standard fill is 5 to 6 oz. Upgraded fill is 7 to 10 oz. Plush fill is 11 to 15 oz. Filling must be one continuous solid sheet extending the entire width and length of bed cover, no joining seams should exist.

Finish

Bedsread edges shall be safety lock stitched with a rolled one inch lock stitched around the entire circumference of the bedsread. Top corners of the bedcovers should be mitered, creating a picture frame look. Overlapped corners are not acceptable because they tend to come apart. Additional finishing options such as welting available upon request.